

# Classic filament LEDbulbs



## LED classic 120W A67 E27 CDL FR ND 1SRT4

Featuring a classic heritage design, Classic filament LEDbulbs combine the familiar shapes of classic incandescent bulbs with the benefits of the long lasting LED technology. They deliver beautiful, decorative warm-white light while saving around 90% on energy costs compared with traditional light bulbs.

#### **Product data**

General information	
Cap-Base	E27 [ E27]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	20000X
Technical Type	13-120W
Flux measurement reference	Sphere
Light technical	
Color Code	865 [ CCT of 6500K]
Luminous Flux (Nom)	2000 lm
Color Designation	Cool Daylight
Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	153.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and electrical	
Input Frequency	50 to 60 Hz

Power (Nom)		
Wattage Equivalent 120 W  Starting Time (Nom) 0.5 s  Warm Up Time to 60% Light (Nom) 0.5 s  Power Factor (Nom) 0.51  Voltage (Nom) 220-240 V  Temperature  T-Case Maximum (Nom) 60 °C  Controls and dimming  Dimmable No  Mechanical and housing  Bulb Finish Frosted	Power (Nom)	13 W
Starting Time (Nom)  Warm Up Time to 60% Light (Nom)  0.5 s  Power Factor (Nom)  Voltage (Nom)  220-240 V  Temperature  T-Case Maximum (Nom)  60 °C  Controls and dimming  Dimmable  No  Mechanical and housing  Bulb Finish  Frosted	Lamp Current (Nom)	120 mA
Warm Up Time to 60% Light (Nom) 0.5 s  Power Factor (Nom) 0.51  Voltage (Nom) 220-240 V  Temperature  T-Case Maximum (Nom) 60 °C  Controls and dimming Dimmable No  Mechanical and housing  Bulb Finish Frosted	Wattage Equivalent	120 W
Power Factor (Nom) 0.51  Voltage (Nom) 220-240 V  Temperature T-Case Maximum (Nom) 60 °C  Controls and dimming Dimmable No  Mechanical and housing Bulb Finish Frosted	Starting Time (Nom)	0.5 s
Voltage (Nom)  220-240 V  Temperature  T-Case Maximum (Nom)  60 °C  Controls and dimming  Dimmable  No  Mechanical and housing  Bulb Finish  Frosted	Warm Up Time to 60% Light (Nom)	0.5 s
Temperature T-Case Maximum (Nom) 60 °C  Controls and dimming Dimmable No  Mechanical and housing Bulb Finish Frosted	Power Factor (Nom)	0.51
T-Case Maximum (Nom) 60 °C  Controls and dimming  Dimmable No  Mechanical and housing  Bulb Finish Frosted	Voltage (Nom)	220-240 V
T-Case Maximum (Nom) 60 °C  Controls and dimming  Dimmable No  Mechanical and housing  Bulb Finish Frosted		
Controls and dimming  Dimmable No  Mechanical and housing  Bulb Finish Frosted	Temperature	
Dimmable No  Mechanical and housing  Bulb Finish Frosted	T-Case Maximum (Nom)	60 °C
Dimmable No  Mechanical and housing  Bulb Finish Frosted		
Mechanical and housing  Bulb Finish Frosted	Controls and dimming	
Bulb Finish Frosted	Dimmable	No
Bulb Finish Frosted		
	Mechanical and housing	
Pulh Shano	Bulb Finish	Frosted
AO7 [A O711111]	Bulb Shape	A67 [ A 67mm]
Approval and application	Approval and application	
Energy Efficiency Class D	Energy Efficiency Class	D


Datasheet, 2022, July 28 data subject to change

# **Classic filament LEDbulbs**

Energy Consumption kWh/1000 h	13 kWh
EPREL Registration Number	374904
Product data	
Full product code	871869976455500
Order product name	LED classic 120W A67 E27 CDL FR ND 1SRT4
EAN/UPC - Product	8718699764555

Order code	929002372001
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	929002372001
Copy Net Weight (Piece)	0.034 kg


## Dimensional drawing




LED classic 120W A67 E27 CDL FR ND 1SRT4

# Product D C LED classic 120W A67 E27 CDL FR ND 1SRT4 70 mm 121 mm


### Photometric data



### LEDbulb 13W A67 E27 865 FR




LEDbulb A67 E27 2000lm CL

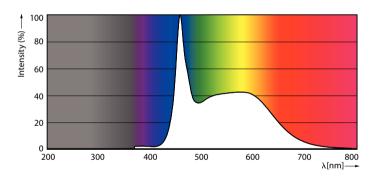


LEDbulb 13W A67 E27 865 FR

# Classic filament LEDbulbs

### Lifetime

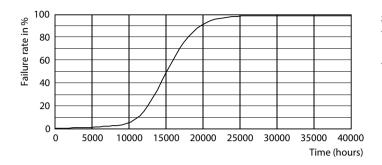

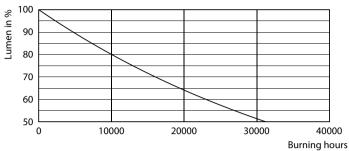

Life Expectancy Diagram

Lumen Maintenance Diagram

