

## PRODUCT DATASHEET

### ST CLAS P 40 FR 4.9 W/2700 K E27

LED STAR CLASSIC P | LED lamps, classic mini-ball shape



#### Areas of application

- Domestic applications
- General illumination
- Atmospheric accent lighting throughout the home
- Outdoor use in suitable outdoor luminaires only

#### Product benefits

- Low energy consumption
- Easy replacement of classic lamps thanks to compact design
- Instant 100 % light, no warm-up time

#### Product features

- LED alternative to conventional lamps
- Mercury-free lamps



## TECHNICAL DATA

### Electrical data

Nominal wattage	4.9 W
Construction wattage	4.90 W
Nominal voltage	220...240 V
Claimed equiv. conventional lamp power	40 W
Nominal current	36 mA
Type of current	AC
Inrush current	10 A
Operating frequency	50...60 Hz
Mains frequency	50...60 Hz
Max. lamp no. on circuit break. 10 A (B)	210
Max. lamp no. on circuit break. 16 A (B)	320
Total harmonic distortion	126 %
Power factor $\lambda$	> 0.50

### Photometrical data


Luminous flux	470 lm
Nominal useful luminous flux 90°	470 lm
Luminous efficacy	95 lm/W
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
Color temperature	2700 K
Color rendering index Ra	≥80
Light color	827
Standard deviation of color matching	≤6 sdc <sub>m</sub>
Rated LLMF at 6,000 h	0.80
Flickering metric (Pst LM)	1.0
Stroboscope effect metric (SVM)	0.9



**Light technical data**

Beam angle	200 °
Warm-up time (60 %)	0.50 s
Starting time	< 0.5 s
Rated beam angle (half peak value)	200.00 °

**Dimensions & Weight**

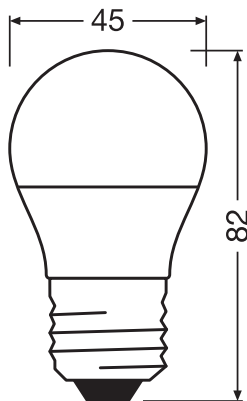

Overall length	82.00 mm
Diameter	45.00 mm
Maximum diameter	45 mm
Product weight	21.00 g

**Temperatures & operating conditions**

Ambient temperature range	-20...+40 °C
---------------------------	--------------



Maximum temperature at tc test point	78 °C
--------------------------------------	-------

### Lifespan

Lifespan	15000 h
Number of switching cycles	100000
Lumen maintenance at end of serv	0.70
Rated lamp survival factor at 6,000	≥ 0.90

### Additional product data

Base (standard designation)	E27
Mercury content	0.0 mg
Mercury-free	Yes
Design / version	Frosted
Product remark	All technical parameters apply to the entire lamp / Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

### Capabilities

Dimmable	No
----------	----

### Certificates & Standards

Energy efficiency class	F 1)
Energy consumption	5.00 kWh/1000h
Type of protection	IP20
Standards	CE / CB / REACH
Photobiological safety group acc. to EN62778	RG0

1) Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)

### Country-specific categorizations

Order reference	LEDSCLP40 4,9W/
-----------------	-----------------

### LOGISTICAL DATA



Temperature range at storage	-20...+80 °C
------------------------------	--------------

### Energy labelling regulation data acc EU 2019/2015

Lighting technology used	LED
Non-directional or directional	NDLS

Mains or non-mains	MLS
Light source cap-type (or other electric interface)	E27
Connected light source (CLS)	No
Color-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Correlated colour temperature type	SINGLE_VALUE
Standby power	0.00 W
Claim of equivalent power	Yes
Length	82.00 mm
Height	45.00 mm
Width	45.00 mm
Chromaticity coordinate x	0.458
Chromaticity coordinate y	0.410
R9 Colour rendering index	0.00
Beam angle correspondence	SPHERE_360
Survival factor	0.90
Displacement factor	0.5
LED light source replaces a fluorescent light source	No
EPREL ID	523323,1403241
Model number	AC31165,AC31165,AC24728

**DOWNLOAD DATA**

DOWNLOAD DATA	
	PRODUCT DATASHEET
	PRODUCT DATASHEET

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075431034	Folding box 1	46 mm x 49 mm x 130 mm	33.00 g	0.29 dm <sup>3</sup>

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075588561	Shipping box 6	159 mm x 111 mm x 106 mm	273.00 g	1.87 dm <sup>3</sup>
4058075431041	Shipping box 10	253 mm x 109 mm x 105 mm	378.00 g	2.90 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### References / Links

- For further products and actual information concerning LED lamps see [www.ledvance.com/ledlamps](http://www.ledvance.com/ledlamps)
- For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.